

RCC-C3HCS

Pre-programmed room controller with built-in CO₂ sensor and communication



RCC-C3HCS is a complete pre-programmed room controller from the Regio Midi series intended to control heating, cooling and CO₂ in a zone control system. It has a built-in CO₂-sensor and communicates via Modbus, BACnet or EXOline for easy system integration.

- ✓ Communication via Modbus, BACnet or EXOline
- ✓ Quick and simple configuration via Regio tool©
- ✓ On/Off or 0...10 V control
- ✓ Built-in CO₂ sensor
- ✓ Input for motion detector, CO₂ sensor, window contact, condensation sensor, or change-over function
- ✓ Supply air temperature limitation

Application

The Regio controllers are suitable for use in buildings requiring high comfort and reduced energy consumption, such as offices, schools, shopping centres, airports, hotels and hospitals.

Function

The controller is a PI controller with configurable P-band, I-time and setpoints for different operating modes.

The controller has a built-in sensors for room temperature and CO₂-level. An external sensor (PT1000) for room temperature, change-over or supply air temperature limitation can also be connected, as well as an external sensor for CO₂.

It can control 0...10 V DC valve actuators and dampers and/or 24 V AC thermal actuators or On/Off actuators with spring return.

The controller can be connected to a central SCADA system via EXOline, BACnet or Modbus and configured for a specific application using the free configuration software Regio tool©.

Installation

The modular design, featuring a separate bottom plate for wiring, makes the entire Regio range of controllers easy to install and commission. The bottom plate can be put into place before the electronics are installed. Mounting takes place directly on a wall or on a wall box.

HEAD OFFICE SWEDEN

Phone: +46 31 720 02 00
 Web: www.regincontrols.com
 E-mail: info@regincontrols.com

RCC-C3HCS

Configuration

The controller is pre-programmed upon delivery, but can be configured using Regio tool©.

Regio tool© is a PC-based program that makes it possible to configure and supervise an installation and change its settings using a comprehensive user interface.

The program is available as a free download on Regin's website www.regincontrols.com.

The controller can be configured for different control modes/control sequences:

- ✓ Heating
- ✓ Heating/Heating
- ✓ Heating/Cooling via change-over
- ✓ Heating/Cooling
- ✓ Heating/Cooling with VAV-control and forced supply air function
- ✓ Heating/Cooling with VAV-control
- ✓ Cooling
- ✓ Cooling/Cooling
- ✓ Heating/Cooling/VAV
- ✓ Change-over with VAV function

Features

Operating modes

There are five different operating modes: *Off*, *Unoccupied*, *Stand-by*, *Occupied* and *Bypass*. They are used to configure the behaviour of the controller.

Bypass: The temperature in the room is controlled in the same way as in the *Occupied* operating mode. The output for forced ventilation is also active. This operating mode is useful for instance in conference rooms, where many people are present at the same time for a certain period of time.

Bypass can also be activated if CO₂ levels are high.

Occupied: The room is in use and a comfort mode is activated. The temperature setpoints are close to keep a good climate in the room.

Stand-by: The room is in energy saving mode and not used at the moment. This can, for instance, be during nights, weekends and evenings. The controller stands by to change operating mode to *Occupied* if presence is detected. The dead band between the setpoints is extended to save energy.

Unoccupied: The room is not used for a extended time period. The dead band is extended even more to save energy.

Off: Heating and cooling are disconnected. Frost protection is still active.

CO₂ control

In control modes where VAV (Variable Air Volume) has been selected, the damper will be affected by the CO₂ levels. If the CO₂ concentration rises, the damper will open to increase air volume regardless of controller temperature requirements. If an external CO₂ detector is configured for AI2, this overrides the internal detector.

Automatic calibration of built-in CO₂ detector

The sensor uses ABC-logic, a self-calibration technique which eliminates the need for recalibration. The sensor will typically reach its operational accuracy after 24 hours of operation. If immediate consistency is desired, the sensors may be single point calibrated using reference gas or ambient air measured by a reference sensor.

Occupancy control

If a connected motion detector indicates movement, the control mode (see above) will change in a pre-determined way, and the temperature is controlled from requirement, making it possible to save energy while maintaining the temperature at a comfortable level.

EC fan control

It is possible to select whether the fan should run in Heating, Cooling or both Heating and Cooling. The fan has both a boost function and a kickstart function.

Change-over function

The controller has an input for change-over that automatically changes the control mode based on the temperature difference between the room temperature and the water temperature in the pipes.

Optionally, a potential-free contact can be used. When the contact is open, the controller will operate using the heating function, and when closed using the cooling function.

Forced ventilation

Regio has a built-in function for forced ventilation. If activated the air flow into the room will increase. It can be activated via presence detection, the buttons on the controller or via communication.

Setpoint adjustment

The user can change the setpoint by pressing the arrow buttons on the controller.

Switching between heating and cooling setpoints takes place automatically in the controller depending on heating or cooling requirements.

Lighting control

The controller can be set to control lighting. When occupancy is detected, lighting is activated, remaining switched on for as long as someone is in the room.

Supply air temperature limitation

The controller can be used with a supply air temperature limitation sensor. A room controller will then work together with a supply air temperature controller using cascade control, resulting in a calculated supply air temperature maintaining the room temperature setpoint.

Built-in safety functions

The controller has an input for a condensation sensor to detect moisture accumulation. If detected, the cooling circuit will be stopped.

The controller also has frost protection. This prevents frost damages by ensuring that the room temperature does not drop below 8°C when the controller is in mode Off.

Actuator exercise

The controller has a function for actuator exercise. The exercise takes place at intervals, settable in hours.

Technical data

| | |
|----------------------------|--|
| Supply voltage | 18...30 V AC, 50 / 60 Hz |
| Power consumption | 2.5 VA |
| Ambient temperature | 0...50°C |
| Storage temperature | -20...+70°C |
| Ambient humidity | Max 90 % RH |
| Protection class | IP20 |
| Communication | RS485 (EXoline or Modbus with automatic detection/change-over, or BACnet) |
| Modbus | 8 bits, 1 or 2 stop bits. Odd, even (FS) or no parity |
| BACnet | MS/TP |
| Communication speed | 9600, 19200, 38400 bps (EXoline, Modbus and BACnet) or 76800 bps (BACnet only) |
| Display | Backlit LCD |
| Weight | 110g |

Technical data, built-in temperature sensor

| | |
|---------------------------|---------------------|
| Temperature sensor | NTC type |
| Temperature range | 0...50°C |
| Accuracy | ±0.5°C at 15...30°C |

Technical data, CO₂ sensor

| | |
|---------------------------------------|--|
| Temperature dependance | 5 ppm per °C or 0.5 % of the reading per °C (whichever is greater) |
| Long term stability | < 2 % of FS over life of a sensor (15 years typical) |
| Response time | < 3 min. for 90 % step change typical |
| Warm-up time | < 2 min. (operational), 10 min. (maximum accuracy) |
| Measuring principle | NDIR (Non-Dispersive Infrared Technology) |
| Measuring range CO₂ | 0...5000 ppm |
| Accuracy | 400...5000 ppm ±25 ppm ± 3 % of the reading |
| Signal update | Every 5 seconds |

Material

| | |
|---------------------------|-------------------|
| Material, housing | Polycarbonate, PC |
| Colour¹ | White RAL9003 |

1. Regio is available in other colours on inquiry. Please contact Regio for more information.

Inputs

| Input type | Sensor | Measuring range | Contact | Suitable Regin product |
|--|-----------------|-----------------|--------------------------------|---|
| External room sensor | Pt1000 | 0...50°C | - | TG-R5/PT1000, TG-UH/PT1000 and TG-A1/PT1000 |
| Supply air temperature limitation sensor | Pt1000 | 0...50°C | - | TG-R5/PT1000, TG-UH/PT1000 and TG-A1/PT1000 |
| Change-over, temperature | Pt1000 | 0...100°C | - | TG-A1/PT1000 |
| Change-over, digital | - | - | Closing potential-free contact | - |
| Motion detector | - | - | Closing potential-free contact | IR24-P |
| Condensation sensor | - | - | - | KG-A/1 |
| Window contact | - | - | Potential-free contact | - |
| CO ₂ sensor | CO ₂ | 0...2000 ppm | - | CTR2A, CTR2A-D |

Outputs

| | |
|---------------------------|--|
| UO1, UO2 | |
| Valve actuator | 0...10 V, max. 5 mA |
| Thermal actuator | 24 V AC, max. 2.0 A |
| On/Off actuator | 24 V AC, max. 2.0 A |
| Output | Heating, cooling, VAV |
| UO3 | |
| Forced ventilation | 24 V AC, max. 2.0 A, or 0...10 V, max. 5 mA |
| Output | Forced ventilation, alt. EC fan or damper following Heating/Cooling in sequence alt. lighting control (on/off) |
| Exercise | Factory setting: 23 hours interval |
| Terminal blocks | Lift type for max. cable cross section 2.1 mm ² |

Setpoint settings via Regio tool

| | |
|-------------------------------|---------------------|
| Basic heating setpoint | 5...40°C |
| Basic cooling setpoint | 5...50°C |
| Setpoint displacement | ±0...10°C (FS=±3°C) |




This product carries the CE-mark. More information is available at www.regincontrols.com.

Accessories

| Article | Description |
|--------------|---|
| Regio tool | Software tool for Regio. Available as a free download on www.regincontrols.com |
| KG-A/1 | Condensation detector, 1 m cable length |
| IR24-P | Motion detector |
| TG-R5/PT1000 | Room temperature sensor |
| TG-UH/PT1000 | Outdoor temperature sensor |

| Article | Description |
|--------------|----------------------------------|
| TG-A1/PT1000 | Clamp-on temperature sensor |
| RC-TEST | Service adapter for Rego Midi |
| RC-CONN:10 | Connection plates, package of 10 |

Dimensions

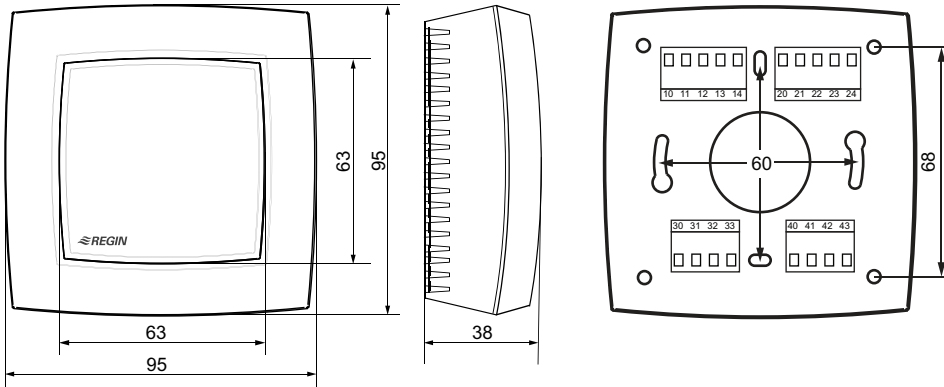

[mm]

Documentation

All documentation can be downloaded from www.regincontrols.com.