

INDUSTRIAL PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The industrial pressure transmitter NAT 8252 features the extremely robust and stable thin-film-on-steel sensor element from its well-proven predecessor NAT 8251. In combination with the new inhouse developed ASIC TX it offers a wide temperature range up to 125°C and triple overpressure safety which makes it the perfect solution for a wide range of demanding applications.



Applications

- Machine tools
- Hydraulics
- HVAC
- Refrigeration
- Process technology
- Water treatment

Features

- Smallest design
- Completely welded steel sensor system without additional seals
- Excellent long-term stability
- High resistance to over pressure

Technical Data

Measuring principle	Thin film on steel	Accuracy @ 25°C typ.	± 0.5 % FS typ.
Measuring range	0 ... 2.5 to 0 ... 600 bar 0 ... 30 to 0 ... 7500 psi	Media temperature	-40°C ... +125°C
Output signal	4 ... 20 mA 0 ... 5 VDC 1 ... 6 VDC 0 ... 10 VDC 0.5 ... 4.5 VDC ratiometric	Ambient temperature	-40°C ... +125°C (Cable PVC 22: -5°C ... +60°C) (Cable PUR 24: -40°C ... +70°C)

03/2016

Data sheet H72303k

Subject to change

Accessories	Female electrical plug M12x1, 5-pole ²⁾	33
	Female electrical connector industrial standard ³⁾	34
	Pressure peak damping element ø 1.0 mm ⁴⁾	40
	Pressure peak damping element ø 0.4 mm ⁴⁾	44
	Seal FPM, -18°C ... +125°C	61
	Seal EPDM, -40°C ... +125°C	63
	Seal NBR, -25°C ... +100°C	83
	Special pin configuration: Pin 2: +, Pin 3: Ground, Pin 4: - (Only for output signal 19 and male electrical plug 01, industrial standard)	90
	Special pin configuration: Pin 1: Out, Pin 2: +, Pin 3: Ground, Pin 4: - (Only for output signals 14, 16, 17, 23 and male electrical plug 01, industrial standard)	91
	Special pin configuration: Pin 1: +, Pin 2: Ground, Pin 3: -, Pin 4: Out (Only for output signals 14, 16, 17, 23 and male electrical plug 32, M12x1, 4-pole)	96
	Special pin configuration: Pin 1: +, Pin 2: -, Pin 4: Ground (Only for output signal 19 and male electrical plug 32, M12x1, 4-pole)	E1
	Special pin configuration: Pin 1: +, Pin 2: -, Pin 3: Out, Pin 4: Ground (Only for output signals 14, 16, 17, 23 and male electrical plug 32, M12x1, 4-pole)	E2
	Cable length 0.5 m	EM
	Cable length 1.0 m	1M
	Cable length 2.0 m	2M

¹⁾ Customized pressure ranges upon request

²⁾ For electrical connections 32 and 35

³⁾ For electrical connection 01

⁴⁾ Max. allowable overpressure 120 bar

⁵⁾ Max. allowable overpressure 500 bar

⁶⁾ Only for pressure connections 17, 30, 32

⁷⁾ Cable length see accessories

⁸⁾ According to norm J1926, max. 35 MPa


Standard products (extra short lead time)

Product No.	Type Code	Pressure range [bar]	Over pressure max. [bar]	Supply [VDC]	Accuracy @ 25°C typ. [%]
NAT2.5A	8252 75 2517 01 0000 0000 19 34 44 61	0 ... 2.5	7.5	9 ... 32	±0.5
NAT4.0A	8252 76 2517 01 0000 0000 19 34 44 61	0 ... 4	12	9 ... 32	±0.5
NAT6.0A	8252 77 2517 01 0000 0000 19 34 44 61	0 ... 6	18	9 ... 32	±0.5
NAT10.0A	8252 78 2517 01 0000 0000 19 34 44 61	0 ... 10	30	9 ... 32	±0.5
NAT16.0A	8252 79 2517 01 0000 0000 19 34 44 61	0 ... 16	48	9 ... 32	±0.5
NAT25.0A	8252 80 2517 01 0000 0000 19 34 44 61	0 ... 25	75	9 ... 32	±0.5
NAT40.0A	8252 81 2517 01 0000 0000 19 34 44 61	0 ... 40	120	9 ... 32	±0.5
NAT100.0A	8252 83 2517 01 0000 0000 19 34 44 61	0 ... 100	300	9 ... 32	±0.5
NAT250.0A	8252 74 2517 01 0000 0000 19 34 44 61	0 ... 250	750	9 ... 32	±0.5
NAT400.0A	8252 84 2517 01 0000 0000 19 34 44 61	0 ... 400	1000	9 ... 32	±0.5
NAT600.0A	8252 86 2517 01 0000 0000 19 34 44 61	0 ... 600	1500	9 ... 32	±0.5
NAT2.5V	8252 75 2517 01 0000 0000 17 34 44 61	0 ... 2.5	7.5	15 ... 32	±0.5
NAT4.0V	8252 76 2517 01 0000 0000 17 34 44 61	0 ... 4	12	15 ... 32	±0.5
NAT6.0V	8252 77 2517 01 0000 0000 17 34 44 61	0 ... 6	18	15 ... 32	±0.5
NAT10.0V	8252 78 2517 01 0000 0000 17 34 44 61	0 ... 10	30	15 ... 32	±0.5
NAT16.0V	8252 79 2517 01 0000 0000 17 34 44 61	0 ... 16	48	15 ... 32	±0.5
NAT25.0V	8252 80 2517 01 0000 0000 17 34 44 61	0 ... 25	75	15 ... 32	±0.5
NAT40.0V	8252 81 2517 01 0000 0000 17 34 44 61	0 ... 40	120	15 ... 32	±0.5
NAT100.0V	8252 83 2517 01 0000 0000 17 34 44 61	0 ... 100	300	15 ... 32	±0.5
NAT250.0V	8252 74 2517 01 0000 0000 17 34 44 61	0 ... 250	750	15 ... 32	±0.5
NAT400.0V	8252 84 2517 01 0000 0000 17 34 44 61	0 ... 400	1000	15 ... 32	±0.5
NAT600.0V	8252 86 2517 01 0000 0000 17 34 44 61	0 ... 600	1500	15 ... 32	±0.5


Specifications		
Accuracy	TEB typ. @ -25 ... +85°C	± 1.75 % FS typ.
	Accuracy @ 25°C typ.	± 0.5 % FS typ.
	NLH @ 25°C (BSL) typ.	± 0.2 % FS typ.
	TC zero point and span typ.	± 0.03 % .FS/K typ.
	Long term stability 1 year typ.	< ± 0.1 % FS typ.
Electrical Data	Output / supply voltage	4 ... 20 mA: 24 (9...32) VDC 0 ... 5 VDC: 24 (9...32) VDC 1 ... 6 VDC: 24 (9...32) VDC 0 ... 10 VDC: 24 (15...32) VDC 0.5 ... 4.5 VDC ratiom., 10 ... 90% U_{supply} : 5 ± 0.25 VDC
	Rise time	typ. 1 ms/10...90 % nominal pressure
	Switch-on-delay	100 ms
	Inverse-polarity protection, short-circuit strenght @ 25°C during 5 min.	4...20 mA: to U_s = 32 VDC 0...10 VDC, 0...5 VDC, 1...6 VDC: to U_s = 28 VDC 0.5...4.5 VDC ratiometric: to U_s = 14 VDC
Environmental conditions	Media temperature	-40°C ... +125°C
	Ambient temperature	-40°C ... +125°C (Cable PVC 22: -5°C ... +60°C) (Cable PUR 24: -40°C ... +70°C)
	Protection ¹⁾	IP65, IP67
	Humidity	Max. 95 % relative
	Vibration	15 g RMS (20...2000 Hz) 25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C)
	Shock	50 g / 11 ms 100 g / 6 ms Male electrical plug M12x1 32, 35
EMC Protection	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
Mechanical Data	Sensor / pressure connection	1.4542 (AISI630)
	Housing	1.4301 (AISI304)
	Sealing	FPM/EPDM/NBR
	Male electrical plug	see ordering information
	Weight	appr. 50 g
	Mounting torque	25 Nm

¹⁾ See Electrical connection


Measuring accuracy

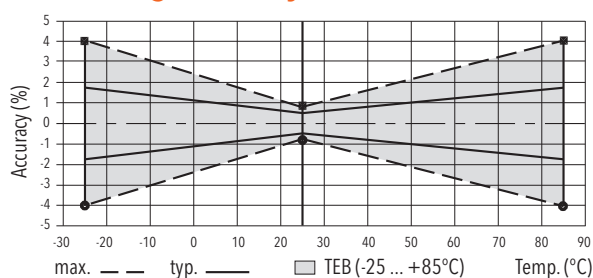


Dimensions

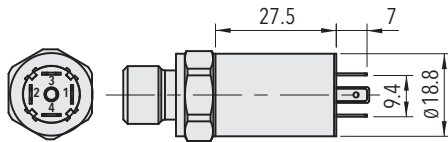


8252.XX.XXXX.01.XX.XX

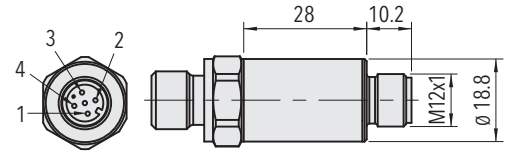


8252.XX.XXXX.32.XX.XX

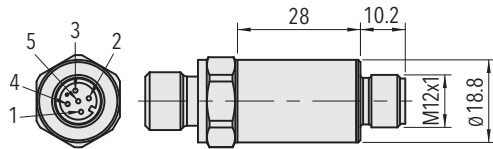


8252.XX.XXXX.35.XX.XX

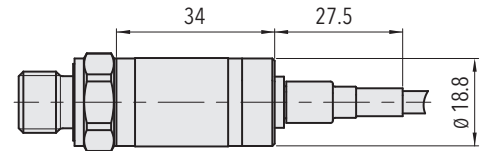


8252.XX.XXXX.22/24/08.XX.XX




8252.XX.XX17.XX.XX.XX




8252.XX.XX30.XX.XX.XX




8252.XX.XX24.XX.XX.XX




8252.XX.XX42.XX.XX.XX




8252.XX.XX19.XX.XX.XX




8252.XX.XX16.XX.XX.XX



8252.XX.XX32.XX.XX.XX







8252.XX.XXXX.XX.XX.33



8252.XX.XXXX.XX.XX.34


Electrical connection

		Protection / electrical connection							
		IP65 *)**)		IP67 *)**)			IP67**)	IP67**)	
		Industrial standard Contact distance 9.4 mm		M12x1			Cable	Cable	
		01		32		35	22/24	08	
									
Output signal		90		E1					
		2	2	1	1	4	white	red	
		1	4	3	2	1	brown	black	
		4	3	4	4	5	yellow	green	
		91		96		E2			
		1	2	1	1	1	2	white	red
		2	1	2	4	3	4	green	white
		3	4	3	3	2	3	brown	black
		4	3	4	2	4	5	yellow	green
8252.XX.XXXX.XX.19									
8252.XX.XXXX.XX.14/16/17/23									

*) Provided female connector is mounted according to instructions

**) Ventilation via male electric plug/cable end

4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

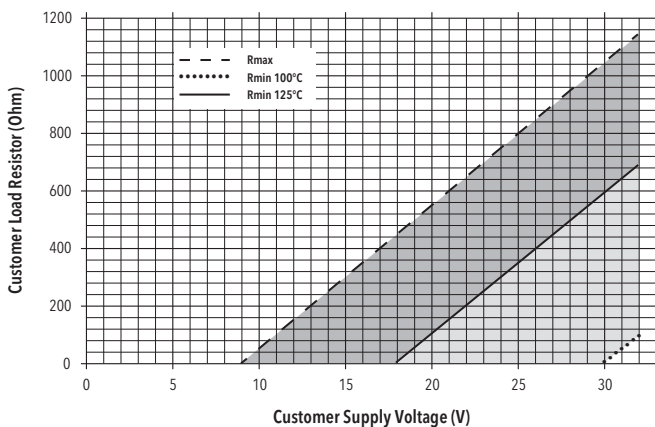

Additional information

Documents

Data sheet	www.trafag.com/H72303
Instructions	www.trafag.com/H73303
Flyer	www.trafag.com/H70666