

TRAFO I5N2/D

Transformer, 15 VA, DIN-rail mounting



Transformer with built-in PTC fuse. Overload and short-circuit proof.

- ✓ 15 VA
- ✓ 2 DIN
- ✓ Short-circuit proof

APPLICATION

TRAFO I5N2/D is used for power supply for control equipment and instrumentation, alarm systems, heating foil or heating cable, halogen lights and other low voltage installations.

FUNCTION

The transformer is double-insulated, short-circuit proof and with a fuse (PTC) to prevent against overloads. The overload protection will automatically reset if the supply voltage is disconnected for a few minutes, allowing for the protection to cool.

INSTALLATION

The transformer is easily mounted on a DIN-rail.

HEAD OFFICE SWEDEN

Phone: +46 31 720 02 00

Web: www.regincontrols.com

E-mail: info@regincontrols.com

TRAFO I5N2/D

— | —

REGIN
THE CHALLENGER


TECHNICAL DATA

Supply voltage	230 V ~ (230 V ~ 50/60 Hz 15 VA)
Output voltage	12 V AC and 24 V AC
Max. load	15 VA
Mounting	DIN-rail
Number of modules	2
Protection class	IP20
Isolation class	II
Temperature class	B
Dimensions, external (WxHxD)	35 x 90 x 60 mm



This product carries the CE-mark. More information is available at www.regincontrols.com.

DIMENSIONS

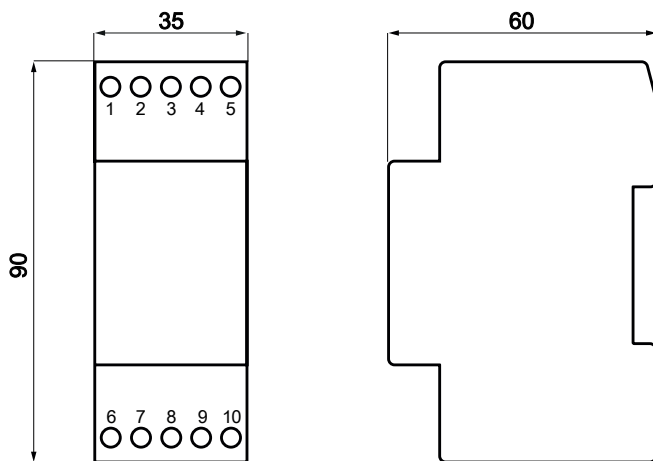

[mm]

WIRING

- ✓ Primary Voltage, 230 V, Terminals 7 and 9
- ✓ Secondary Voltage, 12 V, Terminals 1-2
- ✓ Secondary Voltage, 12 V, Terminals 2-3
- ✓ Secondary Voltage, 24 V, Terminals 1 and 3

PRODUCT DOCUMENTATION

All documentation can be downloaded from www.regincontrols.com.